

# Suavé Due

## available sizes




**AECSUA••1632S**  
16" x 32" smooth finish




**AECSUA••416S**  
4" x 16" smooth finish




**AECSUA••412T**  
4" x 12" tumbled finish



**AECSUA••1616S**  
16" x 16" smooth finish



**AECSUA••OPUS**  
5/8" x 12" opus liner  
smooth finish




**AECSUA••FRANCE**  
1-3/4" x 12" france rail  
smooth finish



**AECSUA••44S**  
4" x 4" smooth finish

## color palette



lynx -LY



pantera -PA



pecora nera -PE



volpe -VO  
\*not available in 16" x 32"

## textures



**AECSUALYFRECCIA**  
lynx freccia mosaic




**AECSUAPFRECCIA**  
pantera freccia mosaic



**AECSUAPEFRECCIA**  
pecora nera freccia mosaic



**AECSUAVFRECCIA**  
volpe freccia mosaic



**AECSUA••FRECCIA**  
14-1/4" x 28" freccia mosaic



**AECSUALYCANAPA**  
4" x 16" lynx canapa



**AECSUAPACANAPA**  
4" x 16" pantera canapa



**AECSUAPECANAPA**  
4" x 16" pecora nera canapa



**AECSUAVOCANAPA**  
4" x 16" volpe canapa



**AECSUA••CANAPA**  
4" x 16" canapa




**AECSUALYGESSATO**  
4" x 16" lynx gessato



**AECSUAPAGESSATO**  
4" x 16" pantera gessato



**AECSUAPEGESSATO**  
4" x 16" pecora nera gessato



**AECSUAVOGESSATO**  
4" x 16" volpe gessato



**AECSUA••GESSATO**  
4" x 16" gessato



**AECSUALYTWILL**  
4" x 16" lynx twill




**AECSUAPATWILL**  
4" x 16" pantera twill



**AECSUAPETWILL**  
4" x 16" pecora nera twill



**AECSUAVOTWILL**  
4" x 16" volpe twill



**AECSUA••TWILL**  
4" x 16" twill

## Applications

| Interior Floor | Interior Wall | Exterior Floor | Exterior Wall | Shower Floor                | Shower Wall | Counter Top | Pool/Fountain |
|----------------|---------------|----------------|---------------|-----------------------------|-------------|-------------|---------------|
| Yes            | Yes           | No             | Yes           | 6" x 6" or smaller, No wood | No wood     | Yes         | No            |


## Installation/Maintenance

| Setting Material | Grout                  | Grout Joint | Membrane         | Caulk            | Sealer                           | Cleaner                               |
|------------------|------------------------|-------------|------------------|------------------|----------------------------------|---------------------------------------|
| Bostik Reflex    | Bostik Hydroment Vivid | 3/16" min.  | Bostik Gold Plus | ColorFast Sanded | Miracle Sealants 511 Impregnator | Miracle Sealants Tile & Stone Cleaner |

Natural stone products are porous and yet durable when properly cared for and maintained. We strongly recommend pre-grout sealing of the stone, use of a non-sanded grout, and post-grout sealing of the stone to prevent staining and etching. A quality impregnating sealer should be used. Only pH neutral cleaners specifically designed for stone should be applied to stone surfaces. Light colored stones may rust and/or discolor over time when exposed to continuous moisture or water. Only honed tiles and 1x1 polished mosaics are suitable for shower floors. Dark stones can fade over time, especially in direct sunlight. Images and product samples are representative of a product's potential characteristics. There is no guarantee that the sample product or images will 100% match the product received. Field, mosaic, and trim tile may not be an exact match. Tiles are subject to variations in color, shade, size, surface texture and finish. Prior to installation, installer must blend tiles from several different boxes to achieve an even distribution of color range. Installer must conduct a dry mock layout under proper lighting conditions prior to installation. It is the consumer's responsibility to inspect the product prior to installation to ensure satisfaction. Once installed, the product is deemed accepted. Check Manufacturer's specifications as some mosaic tiles may not be appropriate for wet applications. Reference the most current TCNA Handbook, ANSI, and Manufacturer's specifications for installation, outdoor use, care and maintenance information. Improper installation, application, use, care and maintenance voids warranty. We reserve the right to make changes to product specifications at any time without notice.


# Suavé Due

**chiave** 12-5/8" x 15-3/4"

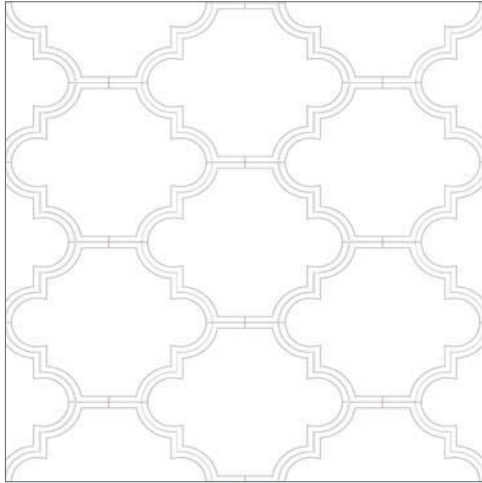


**AECSUACVCHIAVE** calacatta/volpe  
**AECSUAVPCHIAVE** volpe/pantera  
**AECSUANVCHIAVE** niccola/volpe

**fiamma** 16" x 16"

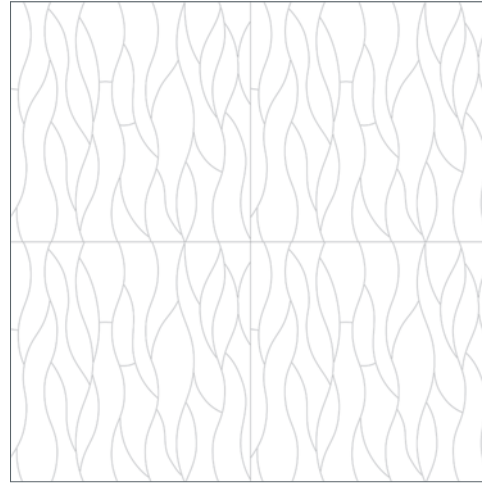


**AECSUACVFIAMMA** calacatta/pantera/volpe

**hexagon** 11-1/4" x 11-3/4"

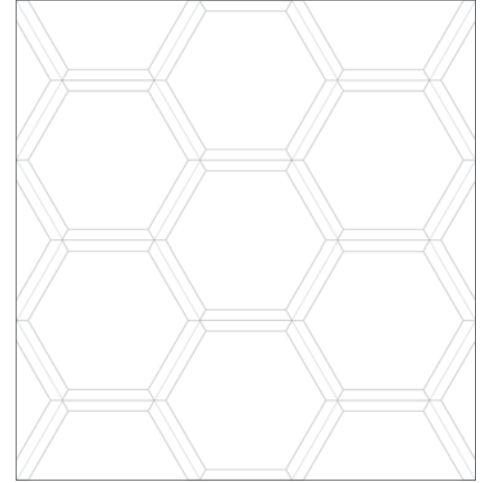

**AECSUACVHEXAGON** calacatta/volpe  
**AECSUAVPHEXAGON** volpe/pantera  
**AECSUANVHEXAGON** niccola/volpe

**turbine** 16" x 16"

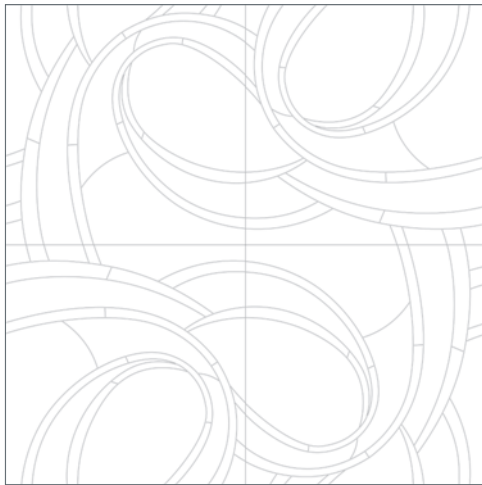

**AECSUACSTURBINE** calacatta/stainless steel

**AECSUAVSTURBINE** volpe/stainless steel



shower wall: pantera twill  
floor: volpe/pantera hexagon

Natural stone products are porous and yet durable when properly cared for and maintained. We strongly recommend pre-grout sealing of the stone, use of a non-sanded grout, and post-grout sealing of the stone to prevent staining and etching. A quality impregnating sealer should be used. Only pH neutral cleaners specifically designed for stone should be applied to stone surfaces. Light colored stones may rust and/or discolor over time when exposed to continuous moisture or water. Only honed tiles and 1x1 polished mosaics are suitable for shower floors. Dark stones can fade over time, especially in direct sunlight. Images and product samples are representative of a product's potential characteristics. There is no guarantee that the sample product or images will 100% match the product received. Field, mosaic, and trim tile may not be an exact match. Tiles are subject to variations in color, shade, size, surface texture and finish. Prior to installation, installer must blend tiles from several different boxes to achieve an even distribution of color range. Installer must conduct a dry mock layout under proper lighting conditions prior to installation. It is the consumer's responsibility to inspect the product prior to installation to ensure satisfaction. Once installed, the product is deemed accepted. Check Manufacturer's specifications as some mosaic tiles may not be appropriate for wet applications. Reference the most current TCNA Handbook, ANSI, and Manufacturer's specifications for installation, outdoor use, care and maintenance information. Improper installation, application, use, care and maintenance voids warranty. We reserve the right to make changes to product specifications at any time without notice.